

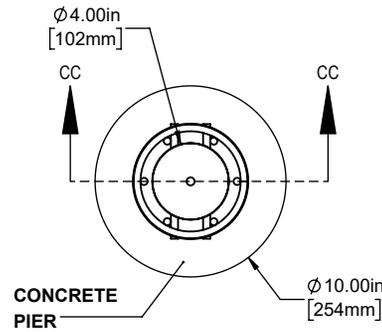
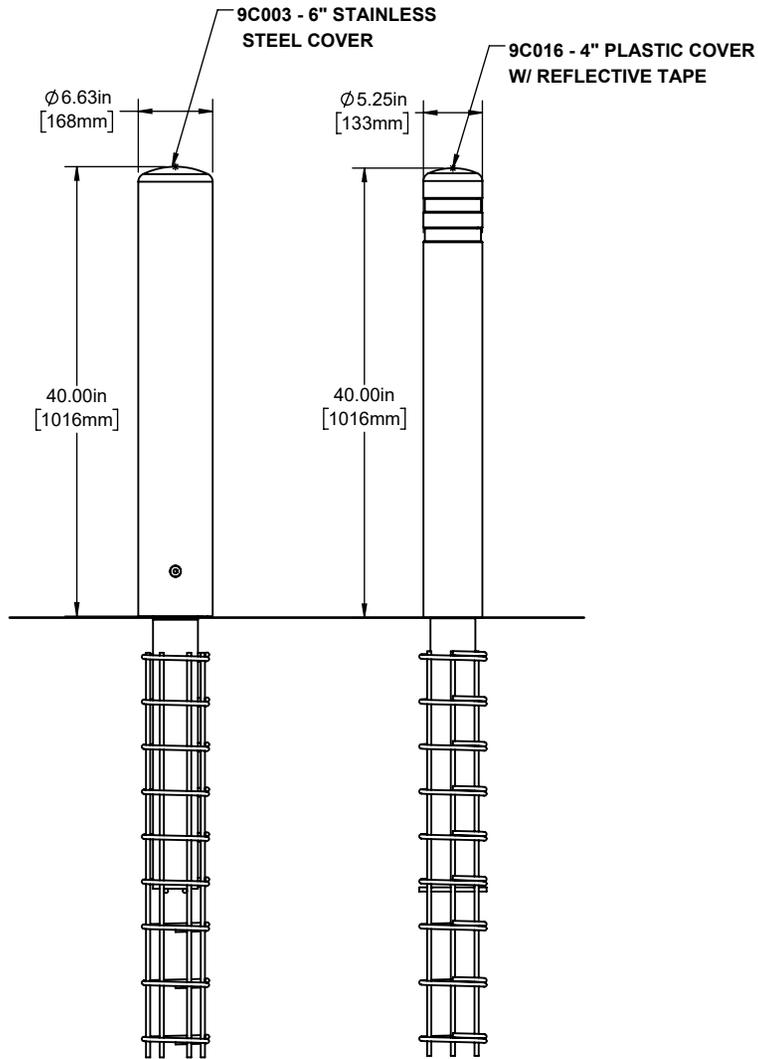


COVER OPTIONS

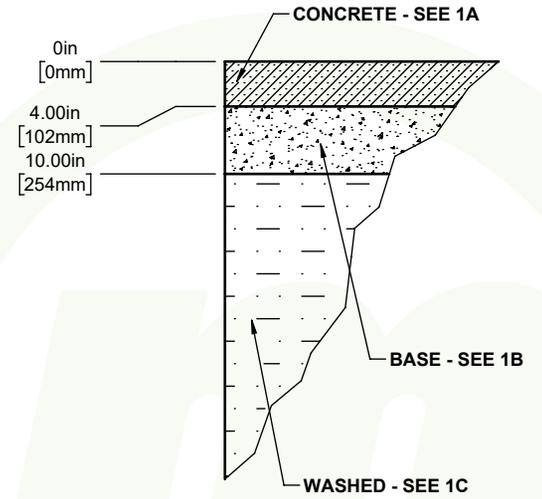

SECTION CC-CC

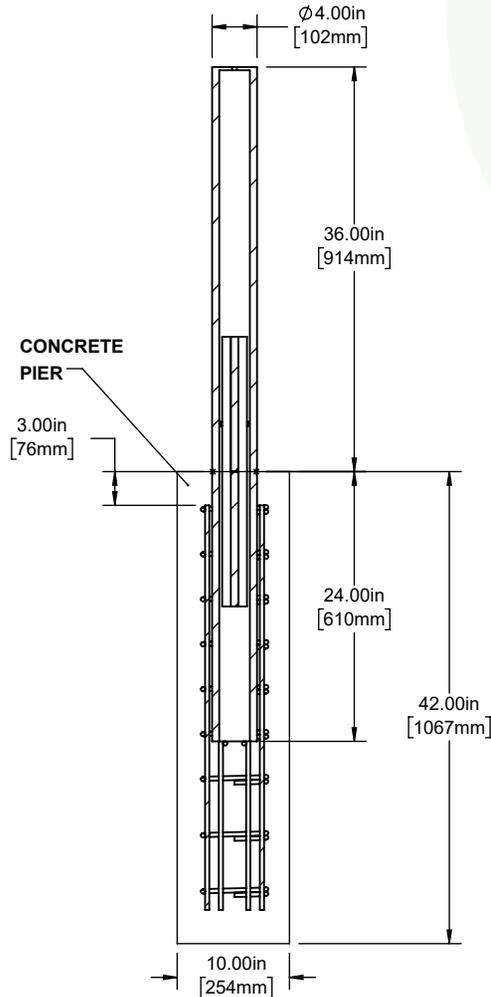

MINIMUM GROUND CONDITIONS REQUIRED

1A: The concrete is 3000 psi minimum unconfined compressive strength, with one layer of #3 (Ø3/8") rebar spaced at 12" each way, with 1-1/4" cover at bottom. Rebar not shown here.

1B: The base is Type A Grade 1 crushed limestone road base, compacted to 90% of standard proctor density.

1C: The washed sand shall be classified as SP - poorly graded sand & be compacted to a density of not less than 90% maximum dry density in accordance with AASHTO Method of Test T099.

**Customer Drawing
CRASHCORE S20**



McCue US
(978) 741-8500
CustomerCare@mccue.com

McCue UK
+44 1908-365-511
UKCServices@mccue.com

McCue China
+86-592-2200 790
ChinaOffice@mccue.com

mccue.com